
# AUTOMATIC SHARPENER FOR GRINDING TIPPED SAW

## TOP-ANGLE ONLY/TOP-ANGLE AND RAKE-ANGLE TYPE TN-7



Grinding of top angle

#### Features

All the settings for the type of teeth are mode on the touch panel.


The numerical drive acts on the values you have input to set a combination of teeth. The grindstone angle is set under numerical control.

Overall throughput and sharpening speed per tooth are steplessly reguralted.

#### **SPECIFICATION**

| <ul> <li>Permissible grinding dimension</li> </ul>              | 152mm~510mm,<br>152mm~610mm (Top only) |
|---|--|
| <ul> <li>Permissible grinding pitch</li> </ul>                  | 5mm~80mm                               |
| <ul> <li>Tooth feed speed, grinding speed</li> </ul>            | 5P~16P (Per minute)                    |
| Grinding tilt angle   | 0°~20°                                 |
| Grindstone dimension  | 140mm                                  |
| Grindstone rotation   | 4,500rpm                               |
| Drive motor output  | 400W                                   |
| <ul> <li>Cutting oil motor output</li> </ul>                    | 40W                                    |
| <ul> <li>Grindstone motor output</li> </ul>                     | 750W                                   |
| Machine floor area  | 575mm×755mm                            |
| <ul> <li>Overall machine height,<br/>width,and depth</li> </ul> | 1840mm×920mm×850mm                     |
| Machine weight  | 520kg                                  |

In our efforts to constantly make improvements, these specifications may change without notice.

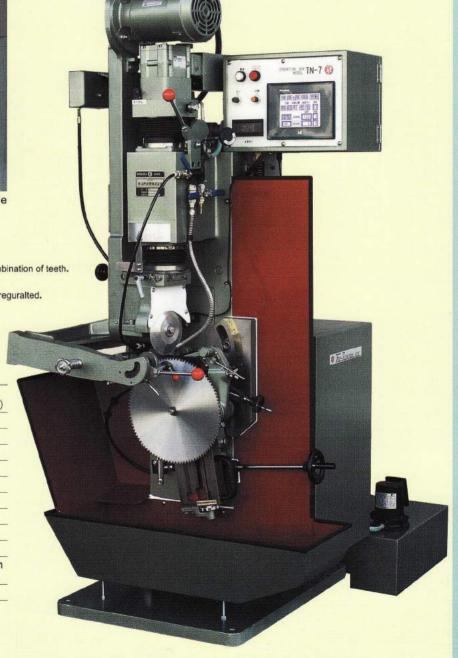



### **TOKAI NETSUSHORI CO.,LTD**

769 Ebitsuka, Iwata city, Shizuoka-ken, Japan 438-0812 TEL 0538-34-5151 FAX 0538-32-3370 URL http://www.tokaiheat.co.jp E-mail: tn@tokaiheat.co.jp